

Cable Compounds

Easy strippable semi conductive thermoset shielding, YLS

E8635 is a conductive thermoset low viscosity compound intended for XLPE and EPR cable with medium to high stripforce. Can be used in both steam cure and dry cure process.

Specifications

E8635 meets the requirements as below, when optimal processing extrusion and end testing procedure are used:

- AEIC CS 5/94
- BS 6622
- HN 33-S-23 (EDF)
- IEC 60502
- IEC 60840
- NF CS 32/321
- VDE 0273 / 12.87
- SS 424 14 16, SS 424 14 17 (HD 620 S1:1996)

Typical physical properties:

Property	Test method	Unit	Typical Value
Density at 23°C	ASTM D1928	g/cm ³	1,19
Hardness Shore A	ASTM D2240	Shore A	82
Hot set 200°C, 20 N/cm ²	IEC 540	%	30/9
Moisture	QAHC-10420, (Karl Fischer method)	PPM	< 800
Tensile strength	ASTM D638	MPa	14
Elongation	ASTM D638	%	300
Mooney viscosity ML (1+4) at 121°C	ISO 289	MU	15

Typical electrical properties:

Property	Test method	Unit	Typical Value
DC Volume Resistivity of Cable at 23°C	ASTM D257	Ohm cm	< 500
DC Volume Resistivity of Cable at 90°C	ASTM D257	Ohm cm	< 1000

Insulation shield adhesion:


Property	Unit	Typical Value
Stripping angle/speed	180°/(50 mm/min)	
Stripping force, XLPE, 23°C	N/cm	17
Stripping force, EPR, 23°C	N/cm	17

Processing conditions

E8635 provides an excellent surface finish when processing conditions are optimised for the actual processing equipment. Actual conditions will vary according to the equipment used, but as a guide we recommend following extrusion conditions:

Desiccant dryer: < 40 °C

Hopper: -

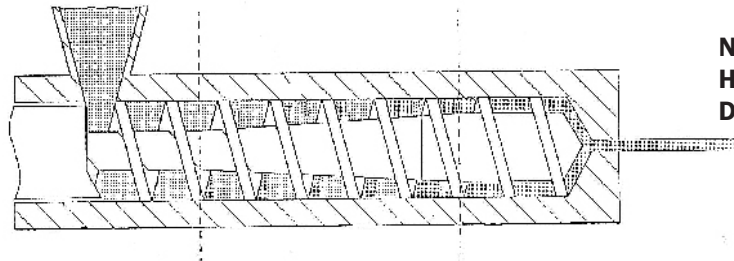

Neck: 100-130°C

Head: 100-130°C

Die: 100-130°C

Screw cooling: -°C

Comments: -

Extruder

Hopper inlet: RT (room temperature)

Barrel: 60-110°C

Delivery

Form: Pellets

Package: 600 kg octabin

Storage/Handling

The material is packed, secured and sealed fulfilling the stated properties above. The material shall be stored in sealed container and under dry and tempered conditions to obtain sustainable performance.

Safety

At temperatures above 230°C there is a risk that acetic acid may be formed.

It is recommended to keep process temperature <260°C.

Safety data sheet is available upon request.

The data sheet should be considered as guidelines, not binding information.

Issue date 2016-11-23. We reserve the right to make changes without prior notification.



WWW. TRELLEBORG.COM/CABLECOMPOUNDS

E-MAIL: cablecompounds@trelleborg.com